



HiMax™ GGL4054

FGE104 [GE, 600, +45/-45]



Product Data Sheet

Fabric Construction

Fibre Type: E-Glass
 Construction: +45/-45
 Fabric Weight: 609 gsm +/- 5%

Stitching Fibre

Stitching Thread: Texturised Polyester
 Stitch DTex: 78
 Stitch Gauge: 6.0 gg
 Stitch Length: 2.5 mm
 Stitch Type: Pillar
 Stitch Weight: 7 gsm


Ply Construction

Layer 2: +45°

Fibre Specification: E-Glass
 Fibre Tex: 300 tex
 Gauge: 18 gg
 Ply Weight: 301 gsm

Layer 1: -45°

Fibre Specification: E-Glass
 Fibre Tex: 300 tex
 Gauge: 18 gg
 Ply Weight: 301 gsm

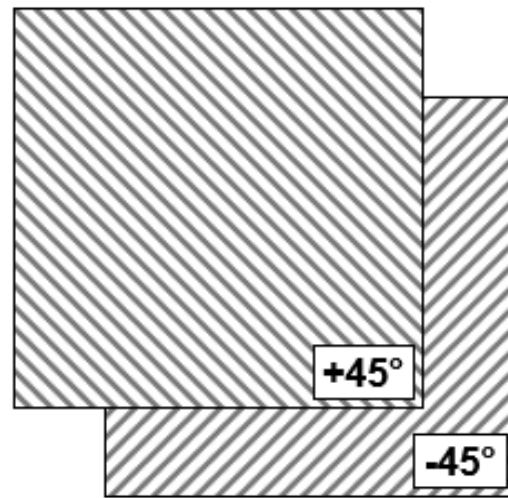

Customisation

| | |
|---------------------------------|--|
| Customer Code and Description: | Customer Specified |
| Fabric Width: | 1270mm (+/- 5mm) - or tapes on application |
| Tracer Threads / Tapered Edges: | Customer Specified |
| Approved Fibres: | On Application |
| Roll Weight / Length: | Customer Specified |
| Cardboard Core: | Customer Specified |
| Packaging: | Customer Specified |



HiMax™ GGL4054

FGE104 [GE, 600, +45/-45]



Product Data Sheet

For more information

Hexcel is a worldwide supplier of composite materials to aerospace and industrial markets.

Our comprehensive range includes:

- HexTow® carbon fibres
- HexForce® reinforcements
- HiMax™ non-crimp fabrics
- HexPly® prepregs
- HexMC® moulding compounds
- HexFlow® RTM resins
- Redux® adhesives
- HexTool® tooling materials
- HexWeb® honeycombs
- Acousti-Cap® sound attenuating honeycomb
- Engineered core
- Engineered products

For quotes, orders and product information call +44 116 275 2200. For other worldwide sales office telephone numbers and a full address list, please go to:

<http://www.hexcel.com/contact/salesoffice>